



TOROLOCO

torolocosrl@gmail.com
www.torolocosrl.com

DVM - DISK HOLDER

TORO LOCO



Toro Loco rotating assembly designed specifically for each type of cut.
Compact body, rotation group with BROUN flange.
Working protection already prepared for water cooling.
Square flanging for vertical or horizontal application.
Ability to make cuts flush with the wall or floor.
Applicable to excavators from 2 to 14 ton.

Model	Oil	Pressure	Cutting depth		Std.
Code	l/min	BAR	cm	Ton	Code
DVM2	28 – 35	200	12/22/32	1,5 – 3,5	SM40
DVM3	55 – 65	200	12/22/32	3 – 6	SM40 SM60
DVM5	60 – 70	250	12/22/32	5 – 8	SM60 SM100
DVM9	85 – 100	250	12/22/32	7 – 15	SM100 SM130 SM160
DVM15	110 – 130	300	12/22/32	12 – 18	SM160 SM200

PDT 45 - ⊘ 450

Adjustable disc protection:

PRD45 - ⊘ 450


PRD60 - ⊘ 600

PRD80 - ⊘ 800




RP - Depth regulator 150/200/250

KH2O - 50L Water tank + support

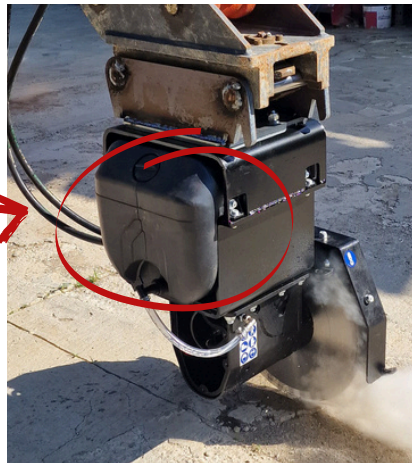

TOROLOCO

MIXED CUT

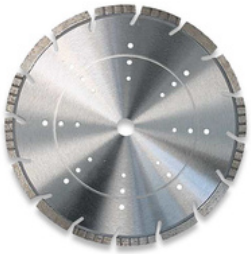

Alternating segment cutting disc for concrete, asphalt and abrasive materials. Diamond segments for excellent durability, alternating with steel disc protection segments. Possibility of making cuts even without the aid of water.

CODE	MAX DEPTH	DISK DIAM.	DISK WIDTH
Code	mm	mm	mm
MIX45.32	140	450	3,2
MIX50.36	170	500	3,6
MIX60.36	220	600	3,6
MIX80.48	320	800	4,8


HARD MATERIALS CUT

CODE	MAX DEPTH	DISK DIAM.	DISK WIDTH
Code	mm	mm	mm
UNI40.32	120	400	3,2

Diamond cutting disc for cutting all materials, metals, plastics, rubber and wood materials. System with short teeth and very coarse grain for optimal removal. Possibility of making cuts even without the aid of water.



TILE - BRICKS CUT

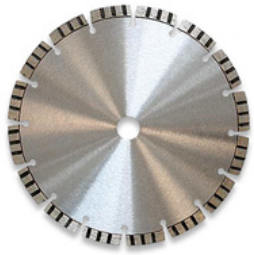

Cutting disc for cement, bricks, tiles and aggregate concrete. Special composition of the segments, distributed in a special way optimized for this type of materials. Possibility of making cuts even without the aid of water.

CODE	MAX DEPTH	DISK DIAM.	DISK WIDTH
Code	mm	mm	mm
MUR50.40	170	500	4,0
MUR60.45	220	600	4,5
MUR70.45	270	700	4,5


ASPHALT CUT

CODE	MAX DEPTH	DISK DIAM.	DISK WIDTH
Code	mm	mm	mm
ASF45.40	140	450	4,0
ASF60.45	220	600	4,5
ASF70.45	270	700	4,5
ASF80.45	320	800	4,5

Diamond cutting disc for cutting asphalt, screeds and abrasive building materials.
Segments of inclined guards to protect the body from wear and tear.
Possibility of making cuts even without the aid of water.



CEMENT CUT

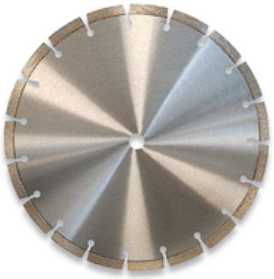

Cutting disc for reinforced concrete and concrete.
Universally suitable for construction, civil engineering.
Possibility of making cuts even without the aid of water.
Laser welded teeth for maximum protection against detachment.


CODE	MAX DEPTH	DISK DIAM.	DISK WIDTH
Code	mm	mm	mm
CEM45.40	140	450	4,0
CEM60.45	220	600	4,5
CEM70.45	270	700	4,5
CEM80.45	320	800	4,5

TOROLOCO

GRINDING WHEEL DISCS


Asphalt, concrete and combined are our range of diamond insert grinding discs, specifically recommended for jobs where cutting thickness is crucial, such as for fiber optic grounding.
Each variant has its own characteristics, qualities and gives the maximum result in certain fields of application and specific working conditions.

ASPHALT

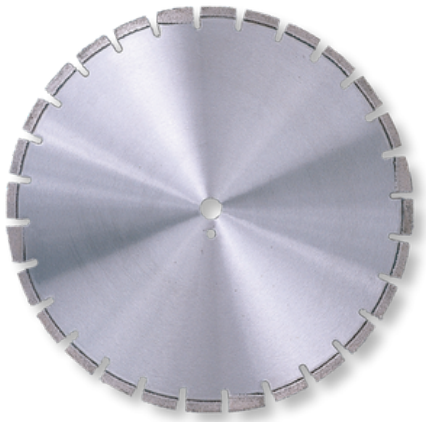

Diamond insert disc/grinder specific for asphalt and abrasive materials.
Available in various widths for laying optical fiber or similar.

CEMENT

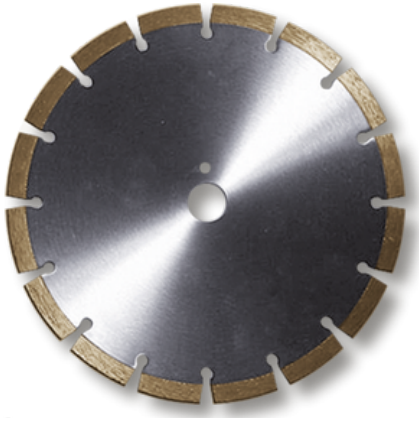

High quality diamond insert disc/grinder for processing cuts and small excavations on concrete, concrete, aggregate and old concrete.
The different widths allow the finished pose to be created.

COMBINED



High quality diamond insert disc/grinder, available in various widths for laying cables directly in materials such as concrete, concrete, aggregate, reinforced concrete and asphalt.

MAX DEPTH	DISK DIAM.	DISK WIDTH	ASPHALT CODE	CEMENT CODE	COMBINED CODE
mm	mm	mm	Code	Code	Code
170	500	10	**AM50.10**	**CM50.10**	**COMBI50.10**
170	500	15	**AM50.15**	**CM50.15**	**COMBI50.15**
170	500	20	**AM50.20**	**CM50.20**	**COMBI50.20**
220	600	10	**AM60.10**	**CM60.10**	**COMBI60.10**
220	600	15	**AM60.15**	**CM60.15**	**COMBI60.15**
220	600	20	**AM60.20**	**CM60.20**	**COMBI60.20**
320	800	10	**AM80.10**	**CM80.10**	**COMBI80.10**
320	800	15	**AM80.15**	**CM80.15**	**COMBI80.15**
320	800	20	**AM80.20**	**CM80.20**	**COMBI80.20**

TORO LOCO SRL Via Zenerigolo, 4/a, 40017, San Giovanni in Persiceto, BOLOGNA - ITALY

TORO LOCO SRL
E-mail: torolocosrl@gmail.com
Web: www.torolocosrl.com
Tel. +39 366 2323780
Tel. +39 392 9786513